



## O2S Location Identification

Oxygen sensor identification includes an engine bank and sensor location number (example: O2S 1 Bank 1). The engine cylinder bank that includes cylinder #1 is designated as Bank 1. The other bank (if applicable) is Bank 2. Sensors located closest to the engine (on each Bank) are numbered as Sensor 1. Sensors are numbered sequentially from front to rear of the exhaust. Sensors 2-4 vary in location, depending on configuration.

### Possible exhaust and O2S configurations

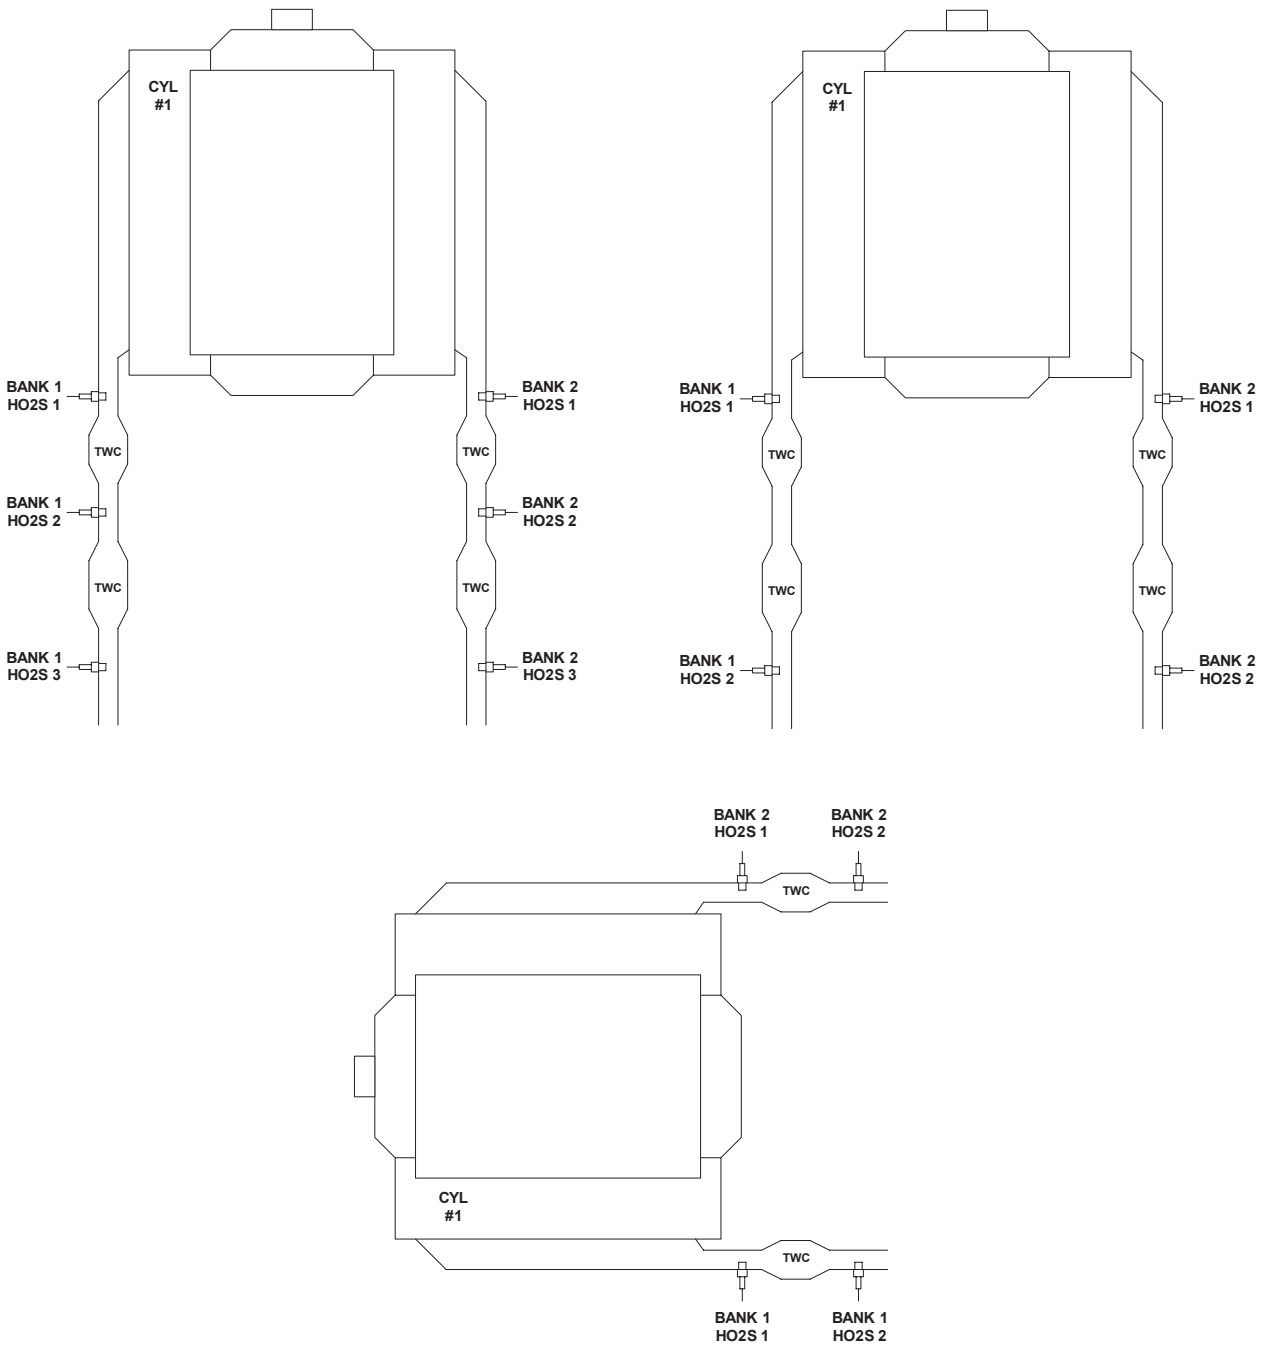

Sensors that are common to both cylinder banks are labeled Bank 1.

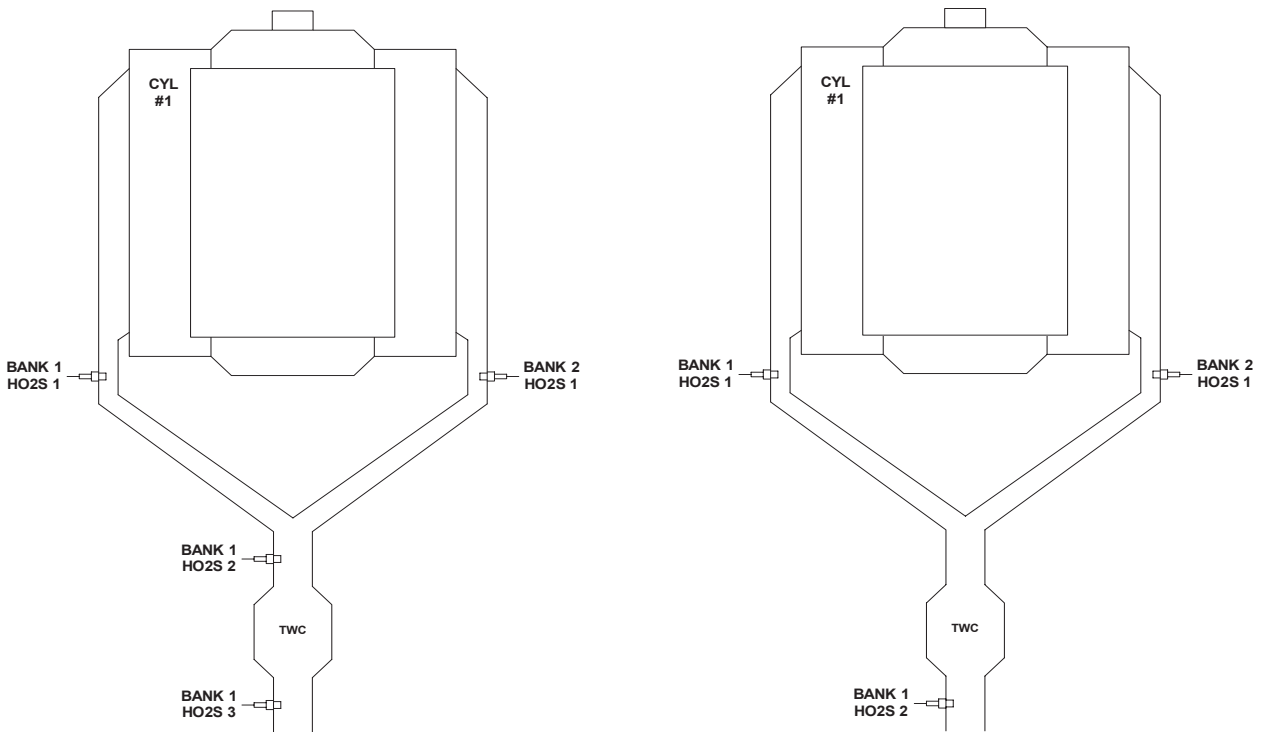

Inline engines may be divided into Bank 1 and Bank 2 also, or may be configured as Bank 1 for all cylinders.

