

Vermont Department of Environmental Conservation

Watershed Management Division
St. Johnsbury Regional Office
1229 Portland Street, Suite 201
St. Johnsbury, VT 05819
www.watershedmanagement.vt.gov

Agency of Natural Resources

[fax] 802-748-6687
[cell] 802-279-1143

AUTHORIZATION TO CONDUCT NEXT FLOOD MEASURES
Pursuant to Section F of the Vermont Stream Alteration General Permit

Project Number: **NFM - 09 – 1032 - 2016**

Applicant Name: Town of Weston Phone: (802) 824-6890

Mailing Address: P.O. Box 98, Weston, VT 05161

Project Location: Greendale Road, 1/2 mile from town garage Email: Garage@westonvt.org

The Secretary of the Vermont Agency of Natural Resources (VT ANR) has determined that:

1. This project authorizes slope stabilization using a stacked stone wall (see attached detail). Slope failure and road damage can occur if this is not done before the next flood event. This is a public safety issue.
2. The proposed activity is eligible for coverage under the VT ANR Stream Alteration General Permit – Next Flood Measures.
3. The proposed activity will meet the terms and conditions of Section F of the General Permit provided:
 - The project will be completed as discussed in the field on 11/21/2016.
 - The project is proportional to the threat and conditioned to cease when the threat to life or to improved property has ended.
 - The project will not result in a threat to life, public health or safety.
 - The project will meet the standards detailed in subsection E.2.1 and E.2.2 of the General Permit.
 - The project will meet Stream Alteration Standards to the greatest extent possible.
 - A pre-construction meeting is held between the contractor, owner/applicant, and the ANR River Management Engineer prior to the start of in-stream work.
 - The River Management Engineer is notified by phone or email when construction begins and when the project is complete. (802) 490-6962, scott.jensen@vermont.gov
 - A final construction inspection is required for any culvert and bridge related work.
 - Additional conditions: _____

If there are any changes in the project plan or deviation in construction from the plan, the Permittee must notify the River Management Engineer immediately.

If the project is constructed as you have described, as shown on the above referenced approved plans and according to the above conditions, there is no reason to expect any violation of Vermont Water Quality Standards.

Alyssa B. Schuren, ANR DEC Commissioner




Dated: **December 12, 2016**

Scott Jensen, P.E., River Management Engineer

Standard Practices

STONE FILL SLOPE PROTECTION WITH STONE TOE WALL

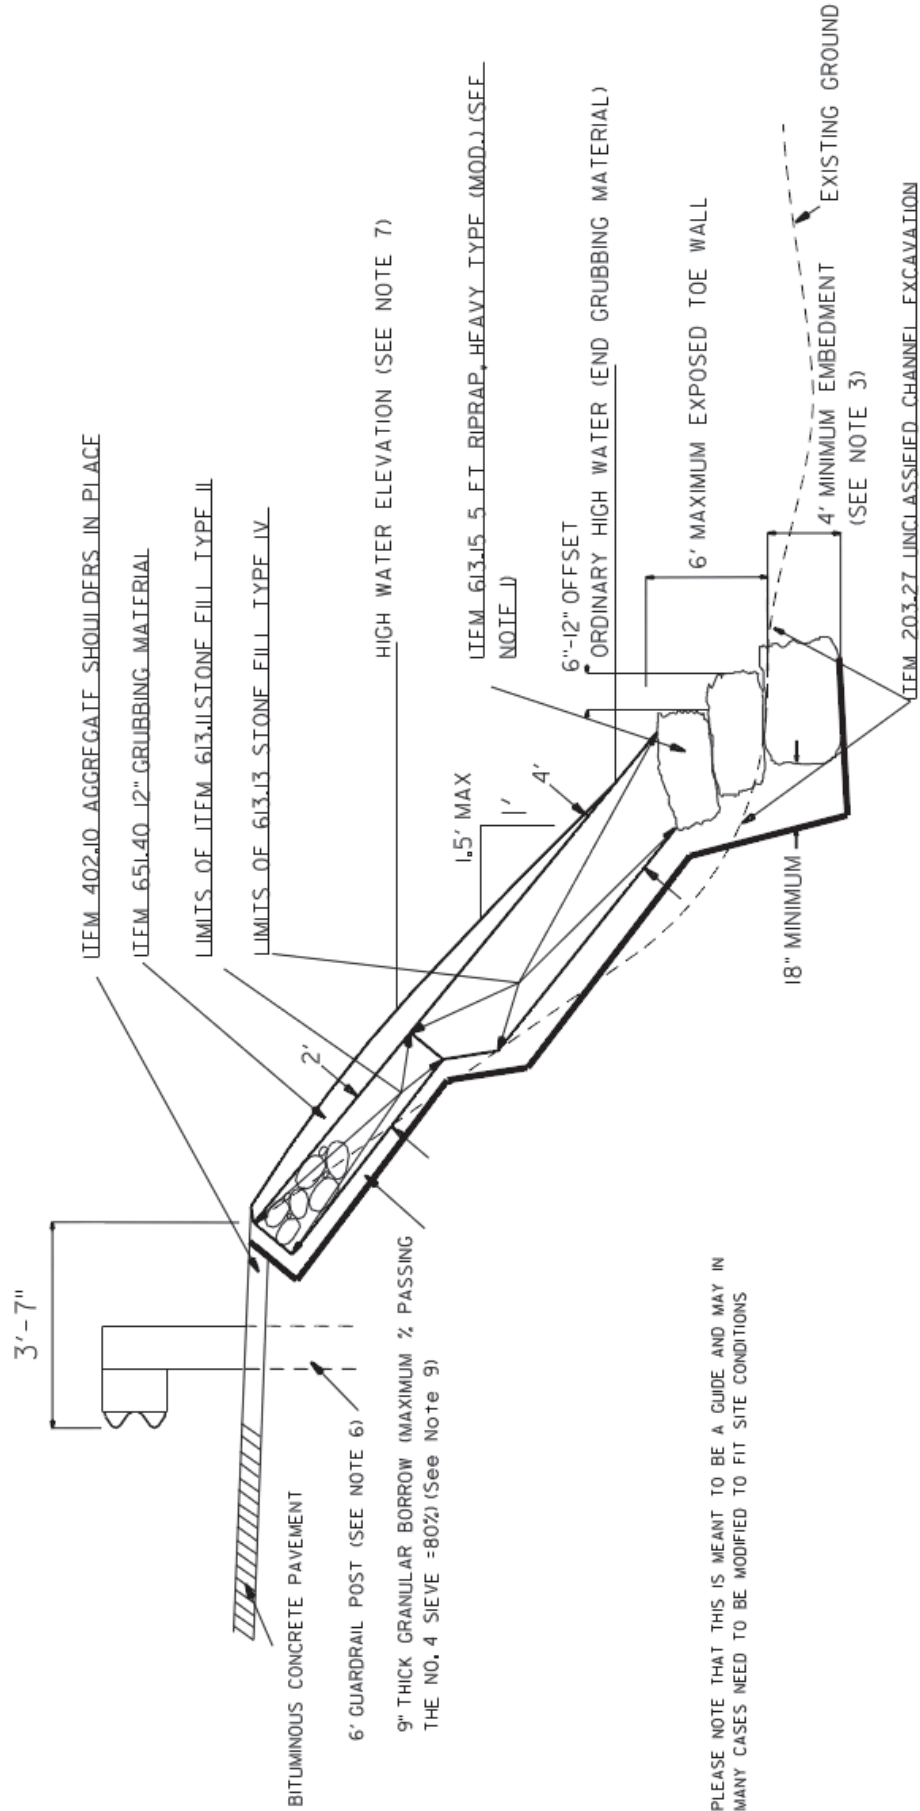

PLEASE NOTE THAT THIS IS MEANT TO BE A GUIDE AND MAY IN MANY CASES NEED TO BE MODIFIED TO FIT SITE CONDITIONS